



Circular spigot with lip seal



Internal measuring tube to sample particles for measurement



Test groove, detail



Pressure measurement point, detail

## TYPE TFM



### FOR CRITICAL AIR CLEANLINESS AND CRITICAL HYGIENE REQUIREMENTS, SUITABLE FOR CEILING INSTALLATION

Particulate filter modules for ceilings as a final filter stage with Mini Pleat filter panels for the separation of suspended particles. Use in laboratories, medical areas, or production rooms in the pharmaceutical and food industries.

- Individual casings can be combined modularly to form ceiling tiles
- Easy, time-saving, and secure filter change due to special press-in frame
- For mounting filters with flat or fluid seal
- With sealing integrity test facility for filter elements
- Integrated differential pressure measuring points
- Internal measuring tube to sample particles for measurement
- Spigot with lip seal
- Flexible suspension
- For air cleanliness classes 5 to 8 according to ISO 14644-1
- Meets the hygiene requirements of VDI 6022
- Leakage classes: L1 according to DIN EN 1886 and D according to DIN EN 15727



TESTED TO VDI 6022

## Introduction



### Application

- Particulate filter module type TFM for ceiling installation as a final filter stage and for air distribution in clean room technology

- Fitting of filter elements for the separation of suspended particles such as aerosols, toxic dusts, viruses and bacteria from the supply or extract air.

#### Classification

- Hygiene-conformity according to VDI 6022
- Leakage classes: L1 according to DIN EN 1886 and D according to DIN EN 15727

#### Nominal sizes

- B × L [mm]

## Description

---



#### Useful additions

- Mini Pleat filter panels with flat seal or fluid seal
- Suitable filter elements to be ordered separately
- Assembly kit for screw connection of single casings to ceiling tiles

#### Special characteristics

- Single casings can be flexibly combined into ceiling tiles
- Inclusion of filters with flat or fluid seals
- High operational reliability due to sealing integrity test facility
- Compact construction with internal measuring units
- Spigot with lip seal ■ Easy assembly due to flexible suspension

#### Construction features

- Pre-drilled connection points for easy assembly of several modules one below the other
- Special test groove enables filters with flat or fluid seals to be fitted
- Clamping mechanism with 2 or 4 fixing points for filter elements (depending on size)
- Integrated test device for checking the tightness of the filter
- Pressure measurement points to monitor the differential operating pressure
- Internal measuring tube to sample particles for measurement
- Spigot circular (arrangement at the top)

#### Materials and surfaces

- Casing made of sheet steel, powder-coated RAL 9010 (pure white)
- Diffuser face plate made of perforated sheet metal with perimeter return edge, powder-coated RAL 9010 (pure white)
- Optional stainless steel construction

#### Installation and commissioning

- Variable suspension
- The filter element is mounted by using a clamping mechanism with 2 or 4 fixing points for filter elements (depending on size)
- Air terminal device with 4-point fixing

#### Standards and guidelines

- Hygiene meets the requirements of VDI 6022, VDI 3803, DIN 1946 Part 4, ÖNORM H 6021 and ÖNORM H 6020, SWKI VA 104-01 and SWKI 99-3, and EN 16798
- Leakage classes: DIN EN 1886, DIN EN 1572

#### Maintenance

- Easy removal of the air terminal device for filter change and decontamination

## TECHNICAL INFORMATION

TECHNICAL DATA, QUICK SIZING, SPECIFICATION TEXT, ORDER CODE, Related products ^

### Specification text

Particulate filter modules type TFM for ceiling installation as a final filter stage and for air distribution in clean room technology. Individual casings with pre-drilled joints can be combined to form modular ceiling tiles. Fitting of filter elements for the separation of suspended particles such as aerosols, toxic dusts, viruses and bacteria from the supply or extract air. Casing with connection from above through spigot with lip seal. Flexible suspension with variable mounting points. Particulate filter module with special clamping mechanism with 2 fixing points for dimensions 600 x 600 or 4 fixing points for dimensions 600 x 900 and 600 x 1200. The TFM casings are suitable for mounting filters with flat or fluid seals. Casing with integrated sealing seat testing facility; measuring tube inside for sampling for particle measurement; pressure measurement points for monitoring the operating pressure difference. Diffuser face plate made of perforated sheet metal with perimeter return edge, powder-coated RAL 9010 (pure white) with 4-point fixing. Leakage test for each casing.

### Special characteristics

- Single casings can be flexibly combined into ceiling tiles
- Inclusion of filters with flat or fluid seals
- High operational reliability due to sealing integrity test facility
- Compact construction with internal measuring units
- Spigot with lip seal ■ Easy assembly due to flexible suspension

### Materials and surfaces

- Casing made of sheet steel, powder-coated RAL 9010 (pure white)
- Diffuser face plate made of perforated sheet metal with perimeter return edge, powder-coated RAL 9010 (pure white)
- Optional stainless steel construction

TFM	/	600 x 900
1		2

1 Type TFM Particulate filter module 2 Nominal size [mm] 600 x 600 600 x 900 600 x 1200


TFM/600x900

Nominal size 600 x 900 mm


## Dimensions v

①		②		③	④	⑤	⑥
B [mm]	L [mm]	B x H x T [mm]	M	∅D	O	kg	
600	600	535 x 535 x 78	248	300	22		
600	900	835 x 535 x 78	313	600	27		
600	1200	1135 x 535 x 78	348	600	34		

Dimensional drawing of TFM



Dimensional drawing of TFM

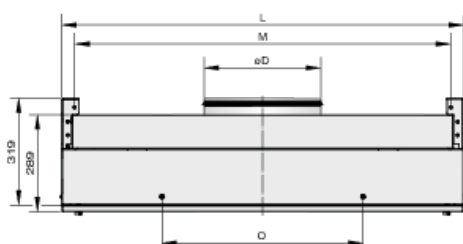

## TROX GmbH



Heinrich-Trox-Platz  
D-47504 Neukirchen-Vluyn  
Tel.: +49 (0)2845 202-0  
Fax: +49 (0)2845 202-265

## myTROX Services

- > TROX Academy
- > Catalogue Download
- > Your contact partner
- > Online fault report
- > BIM

## Service-Hotlines

Sales Germany  
and technical consulting  
+49 (0)2845 202-0  
[Contact](#)

Technical service  
+49 (0)2845 202-400  
[Contact](#)

## TROX IN SOCIAL WEB