

...



TNC-A1353



## TNC-A1353

THE AS-I CONTROLLER WITH 1 MASTER IS A COMPACT AS-I MASTER SYSTEM WITH INTEGRAL TEXT AND GRAPHIC DISPLAY; IT IS USED AS A STAND-ALONE CONTROL SYSTEM. IT IS PROVIDED WITH AN RS232C INTERFACE AND AN ETHERNET INTERFACE

Controller for controlling actuators and for monitoring the damper blade position and duct smoke detectors

- Controller with TROXNETCOM Basic User Software
- Easy and safe commissioning without programming
- Controller with master function for stand-alone operation
- System monitoring
- Automatic recognition of components and their status
- Menu-driven user interface (controller display) for system configuration
- Peripheral equipment can be tested without additional auxiliary equipment

## Application




### Application

- AS-i controller TNC-A1353 with 1 master for 31 AS-i slaves
- Decentralised operating and monitoring system with signal preprocessing and gateway
- With TNC Basic User Software
- Recognition of all slaves on a bus
- For initialising the AS interface network
- Error diagnosis and signalling
- LC display, 43 × 28 mm, also for operation
- Ethernet
- Modbus/TCP interface

## TECHNICAL INFORMATION

### AS-i controller TNC-A1353

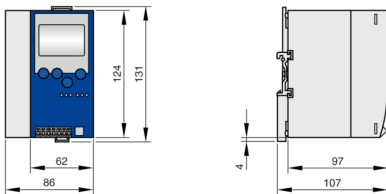

...

Description	TNC-A1353
Supply voltage	24 V DC
Current consumption	< 400 mA
Power consumption	< 10 VA
Programming interface	RS232C: RJ11; 9600 – 115200 Bd, galvanically isolated Ethernet CAA, RJ45; 10/100 MBd
Data interface	Modbus/TCP
Diagnosis via PROFIBUS DP	Yes
PLC memory for user program	128 Kwords
Display	Graphic LC display 128 x 64 pixels, 43 x 28 mm
Max. acceptable rel. humidity	< 95 %
Status LED	1 x red; 2 x green; 3 x yellow
Ambient temperature	0 to 60 °C
Storage temperature	-20 to 70 °C
Protection level	IP 20
MTTF	5.2 years
AS-i profile	M3
AS-i certificate	In preparation
Casing materials	Aluminium, galvanised sheet steel
Casing dimensions	124 x 97 x 86 mm
Fixing	On DIN mounting rail

#### Standard description (characteristics)

AS-i controller TNC-A1353 (1 master) is a compact AS-i master system with integral text/graphic display and Ethernet interface. (Modbus TCP)

- Control of components as part of fire damper control

Integral TNC Basic User Software with the following functions:

- Automatic recognition of TROX modules and their functions
  - Automatic grouping
  - Network control
  - Automatic functional test
  - Manual control of dampers
  - Integral display, also for operation
  - Simple, menu-driven configuration and adjustment
- 
- Supply voltage: 24 V DC
  - Total current consumption from AS-i: < 400 mA
  - Casing materials: Aluminium, galvanised sheet steel
  - Ambient temperature: 0 – 60 °C
  - Protection level: IP 20
  - Status display: LEDs, 1 x red, 2 x green, 3 x yellow
  - Make: TROX GmbH or equivalent
  - Type: TNC-A1353

...

# TNC – A1305



## **1** Component

<b>TNC-A1305</b>	Controller with PROFIBUS DP interface; 1 master
<b>TNC-A1306</b>	Controller with PROFIBUS DP interface; 2 masters
<b>TNC-A1353</b>	Controller with Modbus/TCP interface; 1 master
<b>TNC-A1354</b>	Controller with Modbus/TCP interface; 2 masters
<b>TNC-A1375</b>	Gateway with PROFIBUS DP interface; 1 master
<b>TNC-A2225</b>	Repeater
<b>TNC-ZB0252</b>	AS-i safety gateway
<b>TNC-Z0119</b>	Passive bus termination
<b>TNC-A1146</b>	AS-i tuner (diagnosis module)

## TROX GmbH



Heinrich-Trox-Platz  
D-47504 Neukirchen-Vluyn  
Tel.: +49 (0)2845 202-0  
Fax: +49 (0)2845 202-265

## myTROX Services

- > Order-Status
- > TROX Academy
- > Catalogue Download
- > Your contact partner
- > Online fault report
- > BIM

## Service-Hotlines

Sales Germany  
and technical consulting  
+49 (0)2845 202-0  
[Contact](#)

Technical service  
+49 (0)2845 202-400  
[Contact](#)

## TROX IN SOCIAL WEB