

...



TNC-EC-AZM DISPLAY  
MODULE



TNC-EC-AZM DISPLAY  
MODULE

## TNC-EC-AZM

### SYSTEM FOR CONTROLLING AND MONITORING MOTORISED FIRE DAMPERS

Stand-alone solution for controlling and monitoring up to 12 motorised fire dampers or up to 24 damper blade end positions

- Easy electrical installation using coded plug connections
- Pre-installed application software
- No additional programming required
- Improves the fire safety



LED/BUZZER  
COMBINATION

## Application




### Application

- Display module for menu-driven operation and error display
- 2.8 inch colour LED and backlit function buttons with rocker switch for cursor allow for menu-driven operation and error display
- Language selection (German, English, Finnish; other languages upon request)
- Connecting cable for data and supply voltage, standard length of 5 m
- Menu-driven functional test
- Manual control of fire dampers
- Password protection

## TECHNICAL INFORMATION

### TNC-EC-AZM

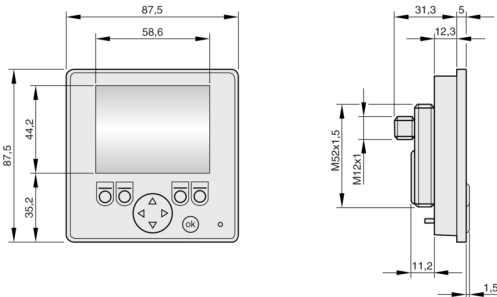

#### Standard description (characteristics)

Menu-driven operation and display of the TNC-EASYCONTROL control system

- 2.8 inch colour LCD with 5 function buttons and rocker switch for cursor
- Language selection (for operation and display): German, English, Finnish
- CAN bus interface
- Supply voltage: 8 – 32 V DC
- Power consumption: 70 mA at 24 V DC
- Dimensions: 87.5 × 87.5 × 37.5 mm (B × H × T)
- Casing: plastic, black
- Protection level: IP 67 when installed in the front panel of the casing, otherwise IP 65
- Operating manual
- Make: TROX GmbH or equivalent
- Type: TNC-EC-AZM

## TNC – EasyControl – Schaltnetzteil

1

### 1 Type

TNC-EasyControl switching power supply unit

...

## TROX GmbH

---



Heinrich-Trox-Platz  
D-47504 Neukirchen-Vluyn  
Tel.: +49 (0)2845 202-0  
Fax: +49 (0)2845 202-265

## myTROX Services

---

- › Order-Status

---

- › TROX Academy

---

- › Catalogue Download

---

- › Your contact partner

---

- › Online fault report

---

- › BIM

---

## Service-Hotlines

---

Sales Germany  
and technical consulting  
+49 (0)2845 202-0  
[Contact](#)

Technical service  
+49 (0)2845 202-400  
[Contact](#)

## TROX IN SOCIAL WEB

---